



Vendor: Cisco

Exam Code: 640-722

Exam Name: Implementing Cisco Unified Wireless
Networking Essentials v2.0

Version: DEMO

Updated 9 Lab Simulation Questions, See from Full Version.

QUESTION 1

What 802.1x role is responsible for moving a port to the authorized state?

- A. Supplicant
- B. Authenticator
- C. Authentication Server
- D. RADIUS Server

Answer: B

QUESTION 2

Drag and Drop Questions

Drag the commands on the left that are enabled during a SSH or Telnet session with a lightweight AP and drop them on the right.

config terminal	Target
debug	Target
show	Target
enable	
clear	
delete	
reload	
upgrade	

Answer:


Drag the commands on the left that are enabled during a SSH or Telnet session with a lightweight AP and drop them on the right.

config terminal	debug
debug	show
show	enable
enable	
clear	
delete	
reload	
upgrade	

QUESTION 3

Refer to the exhibit. Based on the diagram, what two design requirements must be met? (Choose

two.)

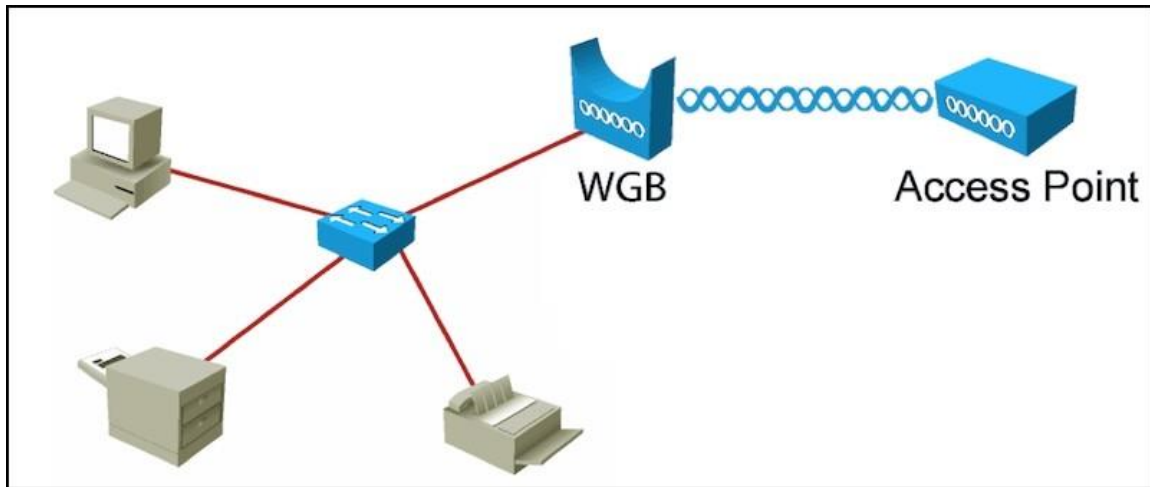

- A. WGB is Autonomous
- B. WGB is Universal
- C. WGB can be Autonomous or Universal
- D. Upstream AP is Aironet
- E. Upstream AP is not Aironet
- F. Upstream AP can be any make/model

Answer: AD

QUESTION 4

An engineer is gathering information for a wireless survey of a hospital. What three pieces of information must be collected for an active survey to assess the outcome best suited for the facility? (Choose three.)

- A. presence of microwave ovens
- B. number of patients that are at the facility
- C. utilization of Location Services or voice applications
- D. floor plans of adjacent facilities
- E. use of wireless for secure records
- F. spectrum analysis to locate all the computer work stations
- G. existing Network Switch types and model numbers
- H. type of devices present on the new wireless network

Answer: ACH

QUESTION 5

A customer mounted three new APs in a small business. After configuring the IP address, users still could not access the web through the new access points. What two configurations are needed to fix this? (Choose two.)

- A. Security parameters
- B. Gateway address
- C. Service Set ID

- D. Antenna option
- E. EAP Authentication
- F. Unique AP Name

Answer: BC

QUESTION 6

Refer to the exhibit. An engineer wants to setup a mobility anchor for the Guest WLAN, but does not see the Anchor IP address listed in the drop-down.
What is the most likely cause of this problem?

Mobility Anchors

WLAN SSID Cisco

Switch IP Address (Anchor) Data Path Control Path

Mobility Anchor Create

Switch IP Address (Anchor) ✓ local

- A. The mobility anchor is currently unreachable.
- B. The mobility anchor must also be included in the mobility group of the WLC.
- C. Layer 3 Security must be configured for Web Policy Authentication.
- D. The mobility anchor is attached to another WLAN.
- E. Layer 3 Security must be configured for Web Policy Passthrough.

Answer: B

QUESTION 7

Drag and Drop

Drag the Cisco WCS report from the left and drop it on the category it reports on to the right.

Worst Interferers	Performance
Network Utilization	CleanAir
PCI DSS Summary	Network Summary
802.11n Summary	Compliance

Answer:

Drag the Cisco WCS report from the left and drop it on the category it reports on to the right.

Worst Interferers	Network Utilization
Network Utilization	Worst Interferers
PCI DSS Summary	802.11n Summary
802.11n Summary	PCI DSS Summary

QUESTION 8

Which two pieces of information are needed for the wireless client to connect to the wireless network? (Choose two.)

- A. SSID
- B. security settings
- C. channel number
- D. AP name

Answer: AB

QUESTION 9

Refer to the exhibit. In WCS, what Monitor submenu would provide the table shown?

Top 5 APs				
AP Name	Map Location	a/n Clients	b/g/n Clients	Total
1252-1	Campus1 > Building1 > Floor1	2	0	2
1252-2	Campus1 > Building1 > Floor1	0	0	0
1250-3	Unassigned	0	0	0
1250-4	Unassigned	0	0	0

- A. Clients
- B. Access Points
- C. Controllers
- D. Security
- E. Alarms

Answer: A

QUESTION 10

Which of the following are three functions of Cisco RRM? (Choose three.)

- A. TPC
- B. intercontroller roaming
- C. dynamic channel assignment

- D. intracontroller roaming
- E. coverage hole detection

Answer: ACE

QUESTION 11

Lab Simulation

Instructions

- THIS TASK DOES NOT REQUIRE DEVICE CONFIGURATION.
- To access the multiple-choice questions, click on the numbered boxes on the left of the top panel.
- There are two multiple-choice questions with this task. Be sure to answer both questions before selecting the Next button.

Scenario

A wireless LAN controller and AP are correctly configured. Verification is needed for the logging attributes while AP power adjustments are needed. Use the exhibits to resolve these issues.

Topology

```

graph LR
    AP[AP] --- SW1[SW1]
    SW1 --- WLC1[WLC1]
    style AP fill:#00a0e3,color:#fff
    style SW1 fill:#00a0e3,color:#fff
    style WLC1 fill:#00a0e3,color:#fff
        
```

WLC 802.11bgn AP

802.11b/g/n Cisco APs > Configure

General		RF Channel Assignment	
AP Name	AP442b.036d.4d0f	Current Channel	11
Admin Status	Enable	Channel Width	20 MHz
Operational Status	UP	Assignment Method	Global
Slot #	0		Custom
		<i>Note: Only Channels 1, 6 and 11 are nonoverlapping</i>	
11n Parameters		Tx Power Level Assignment	
11n Supported	Yes	Current Tx Power Level	5
ClientLink	<input type="checkbox"/>	Assignment Method	Global
			Custom 5
CleanAir		Performance Profile	
CleanAir Capable	No	View and edit Performance Profile for this AP	
CleanAir Admin Status	Disable	Performance Profile	
		<i>Note: Changing any of the parameters causes the Radio to be temporarily disabled and thus may result in loss of connectivity for some clients.</i>	
Antenna Parameters			
Antenna Type	Internal		
Antenna	A <input checked="" type="checkbox"/>		
	B <input checked="" type="checkbox"/>		
	C <input checked="" type="checkbox"/>		

WLC 802.11an AP

802.11an Cisco APs > Configure

General AP Name: AP442b.036d.4d0f Admin Status: Enable Operational Status: UP Slot #: 1		RF Channel Assignment Current Channel: 149 Channel Width: 20 MHz <small>* Channel width can be configured only when channel configuration mode</small> Assignment Method: Global	
11n Parameters 11n Supported: Yes ClientLink: <input type="checkbox"/>		Tx Power Level Assignment Current Tx Power Level: 4 Assignment Method: Custom 4	
CleanAir CleanAir Capable: No CleanAir Admin Status: Disable		Performance Profile View and edit Performance Profile for this AP Performance Profile <small>Note: Changing any of the parameters causes the Radio to be temporarily disabled and thus may result in loss of connectivity for some clients.</small>	
Antenna Parameters Antenna Type: Internal Antenna: A, D, C (all checked)			

Logging

MONITOR WLANs CONTROLLER WIRELESS SECURITY MANAGEMENT COMMANDS HELP FEEDBACK

Syslog Configuration

Syslog Server IP Address: [Add](#)

Syslog Server

10.10.10.25 [Remove](#)

Syslog Level: Errors
 Syslog Facility: Local Use 0

Msg Log Configuration

Buffered Log Level: Alerts
 Console Log Level: Critical
 File Info: ☒
 Trace Info: ☒

Which four levels of messages will be sent to the logging server? (Choose four.)

- A. alerts
- B. critical
- C. debugging
- D. emergencies
- E. errors

- F. informational
- G. notifications
- H. warnings

Answer: ABDE

Explanation:

There are a total of 8 logging severity levels. They are:

Level Number	Severity Level	Description
0	emergencies	System is unusable.
1	alert	Immediate action is needed.
2	critical	Critical conditions.
3	error	Error conditions.
4	warning	Warning conditions.
5	notification	Normal but significant conditions.
6	informational	Informational messages only.
7	debugging	Debugging messages only.

We can see from the output that the severity level was set to Critical, which means that all messages level 3 and less will be sent.

QUESTION 12

An engineer is troubleshooting why wireless clients have not been able to connect to the network. Where would an engineer verify the total number of excluded clients in the last day?

- A. Security > Miscellaneous
- B. Security > Rogues
- C. Alarms
- D. Events
- E. Clients > Troubleshoot
- F. Access Points

Answer: A

Thank You for Trying Our Product

Lead2pass Certification Exam Features:

- ★ More than **99,900** Satisfied Customers Worldwide.
- ★ Average **99.9%** Success Rate.
- ★ **Free Update** to match latest and real exam scenarios.
- ★ **Instant Download** Access! No Setup required.
- ★ Questions & Answers are downloadable in **PDF** format and **VCE** test engine format.
- ★ Multi-Platform capabilities - **Windows, Laptop, Mac, Android, iPhone, iPod, iPad**.
- ★ **100%** Guaranteed Success or **100%** Money Back Guarantee.
- ★ **Fast**, helpful support **24x7**.



View list of all certification exams: <http://www.lead2pass.com/all-products.html>



Microsoft



ORACLE



CITRIX



JUNIPER
NETWORKS



EMC²
where information lives®

10% Discount Coupon Code: ASTR14